


TRANSLUCENT SILICONE TUBING

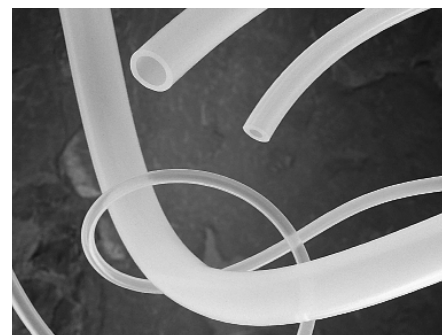

- Manufactured from FDA-sanctioned ingredients
- Translucent, natural color for visual contact with flow
- Resilient, stretchable and resilient to compression set
- Does not impart taste or odor
- Ultraviolet and ozone resistant

Hardness, Shore A:	50 ± 5
Tensile Strength:	1100 psi
Elongation at Break:	375%
Brittle Temperature:	-100°F
Maximum Operating Temperature:	500°F
Tear Resistance:	100 ppi
Flammability UL:	94HB

ICO RALLY Part Number	Inside Diameter	Outside Diameter	Wall Thickness	Standard Lengths	Working PSI at 70°F	Burst PSI at 70°F
IR-14300	1/16	1/8	1/32	100'	10	30
IR-14304	1/16	3/16	1/16	100'	20	60
IR-14308	3/32	5/32	1/32	100'	10	30
IR-14310	3/32	7/32	1/16	100'	15	45
IR-14316	1/8	3/16	1/32	100'	10	30
IR-14318	1/8	1/4	1/16	100'	20	60
IR-14320	1/8	5/16	3/32	100'	25	75
IR-14322	1/8	3/8	1/8	100'	25	75
IR-14326	5/32	9/32	1/16	100'	20	60
IR-14328	5/32	11/32	3/32	100'	20	60
IR-14332	3/16	1/4	1/32	100'	5	15
IR-14334	3/16	5/16	1/16	100'	20	60
IR-14336	3/16	3/8	3/32	100'	20	60
IR-14338	3/16	7/16	1/8	100'	15	45
IR-14342	1/4	5/16	1/32	100'	10	30
IR-14344	1/4	3/8	1/16	100'	5	15
IR-14346	1/4	7/16	3/32	100'	20	60
IR-14348	1/4	1/2	1/8	100'	15	45
IR-14352	5/16	7/16	1/16	100'	10	30
IR-14354	5/16	1/2	3/32	100'	10	30
IR-14360	3/8	1/2	1/16	100'	10	30
IR-14362	3/8	9/16	3/32	100'	10	30
IR-14364	3/8	5/8	1/8	100'	10	30
IR-14366	3/8	3/4	3/16	100'	15	45
IR-14372	7/16	5/8	3/32	100'	10	30
IR-14376	1/2	5/8	1/16	100'	5	15
IR-14378	1/2	11/16	3/32	100'	5	15
IR-14380	1/2	3/4	1/8	100'	10	30
IR-14382	1/2	7/8	3/16	100'	10	30
IR-14386	5/8	13/16	3/32	100'	5	15
IR-14388	5/8	7/8	1/8	100'	5	15
IR-14390	5/8	1"	3/16	100'	10	30
IR-14394	3/4	1"	1/8	100'	5	15
IR-14396	3/4	1-1/8"	3/16	100'	10	30

TRANSLUCENT SILICONE BRAIDED REINFORCED HOSE



Hardness, Shore A (Core):	70 ± 5
Hardness, Shore A (Cover):	60 ± 5
Tensile Strength:	1000 psi
Elongation at Break:	350%
Brittle Temperature:	-80°F
Maximum Operating Temperature:	350°F

ICO RALLY Part Number	Inside Diameter	Outside Diameter	Wall Thickness	Standard Lengths	Working PSI at 70°F	Burst PSI at 70°F
IR-14420	0.125	0.365	0.120	100'	230	695
IR-14424	0.187	0.447	0.130	100'	215	645
IR-14428	0.250	0.520	0.135	100'	205	620
IR-14432	0.312	0.592	0.140	100'	180	545
IR-14436	0.375	0.655	0.140	100'	165	495
IR-14440	0.500	0.800	0.150	100'	140	420
IR-14444	0.625	0.965	0.170	50'	115	345
IR-14448	0.750	1.100	0.175	50'	90	270
IR-14452	1.000	1.360	0.180	50'	75	225

- Polyester braid incorporated within the wall of silicone hose
- Manufactured from FDA-sanctioned ingredients
- Translucent, natural color for visual contact with flow
- Does not impart taste or odor
- Ultraviolet and ozone resistant