


FLEX GUARD WIRE LOOM

WIRE PROTECTION SLEEVE

FGP's unique design permits easy, fast installation as a harness protective covering. The loom provides an easy opening seam for quick wire insertion. Since this seam is not permanently sealed, the costs for repair or service is reduced. Made of durable polyethylene, it is a harness covering material, resistant to temperature, weather and corrosion conditions. The convoluted surface enhances the appearance of your product by providing a uniform, tailored finish.

Operating Temperature Range: -40°F (-40°C) to 175°F (120°C)
 Standard Colors: Black* (Non-Flame Retardant)
 Gray (Flame Retardant)
 Standard Shipping Length: Coils

Note: Standard Material is slit. Un-slit material also available.

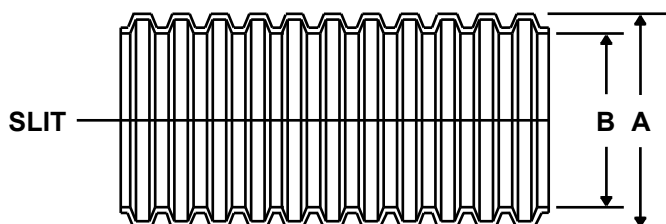

NON-FLAME RETARDANT POLYETHYLENE

Catalog Number Size	Nominal I.D. (B)		Maximum O.D. (A)		Std. Length ft / pkg.
	inches	mm	inches	mm	
FGP-5660-1/8	0.168	4.27	0.260	6.60	100, 500
FGP-5683-1/4	0.265	6.73	0.390	9.91	100, 500
FGP-5661-3/8	0.400	10.16	0.571	14.50	100, 500
FGP-5662-1/2	0.505	12.83	0.670	17.02	100, 500
FGP-5695-5/8	0.665	16.89	0.830	21.08	100, 500
FGP-5663-3/4	0.760	19.30	0.935	23.75	50, 250
FGP-5696-1"	1.006	25.55	1.280	32.51	50, 250
FGP-5698-1-1/2	1.550	39.37	1.860	47.24	25, 100
FGP-5699-2"	2.010	51.05	2.420	61.47	25, 100

*Other colors available, consult factory
 Master package quantities available upon request

FLAME RETARDANT POLYETHYLENE

Catalog Number Size	Nominal I.D. (B)		Maximum O.D. (A)		Std. Length ft / pkg.
	inches	mm	inches	mm	
FGP-13156-1/4	0.265	6.73	0.390	9.91	100, 500
FGP-13158-3/8	0.400	10.16	0.571	14.50	100, 500
FGP-13159-1/2	0.505	12.83	0.670	17.02	100, 500
FGP-13160-5/8	0.665	16.89	0.830	21.08	100, 500
FGP-13170-3/4	0.760	19.30	0.935	23.75	50, 250
FGP-13180-1"	1.006	25.55	1.280	32.51	50, 250
FGP-13181-1-1/4	1.295	32.89	1.500	38.10	25, 100
FGP-13182-1-1/2	1.550	39.37	1.860	47.24	25, 100

Master package quantities available upon request