


PREMIUM NYLON HOSE CLAMPS

ICO RALLY Part Number	Description Color: White	Inside Diameter Clamping Range		Profile Width (B)	Profile Thickness (C)
		Min. (A)	Max. (A)		
IR-14640	NHC-1/4"	.246	.290	.218	.062
IR-14642	NHC-5/16"	.300	.350	.218	.046
IR-14644	NHC-3/8"	.360	.406	.218	.062
IR-14646	NHC-7/16"	.410	.468	.250	.062
IR-14648	NHC-1/2"	.475	.536	.218	.062
IR-14650	NHC-9/16"	.538	.608	.250	.062
IR-14652	NHC-5/8"	.597	.665	.250	.062
IR-14654	NHC-11/16"	.670	.780	.218	.062
IR-14656	NHC-3/4"	.730	.830	.218	.062
IR-14658	NHC-7/8"	.870	.975	.218	.062
IR-14660	NHC-1"	.953	1.093	.250	.062
IR-14662	NHC-1-1/8"	1.031	1.187	.312	.062
IR-14664	NHC-1-5/16"	1.250	1.425	.312	.062
IR-14666	NHC-1-1/2"	1.406	1.610	.343	.062
IR-14668	NHC-1-11/16"	1.593	1.812	.343	.062
IR-14670	NHC-1-7/8"	1.790	2.110	.343	.062
IR-14672	NHC-2"	1.870	2.125	.406	.062

Premium Nylon Hose Clamps provide a superior seal on hose or tubing products through an interlocking design.

As the interlocking grooves are ratcheted together, the clamping diameter of the fastener is aligned in parallel, creating a uniform clamping surface.

Clamps may be removed by separating the clamping halves in a perpendicular direction at the seal.

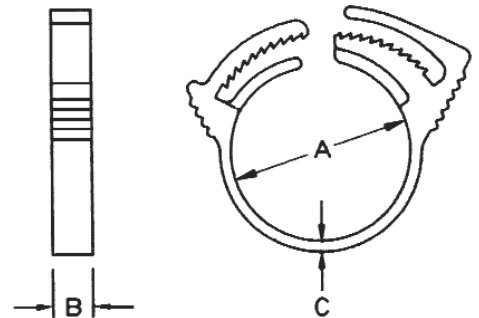

STAINLESS STEEL WORM GEAR CLAMPS

ICO RALLY Part Number	Description All Stainless	Inside Diameter Clamping Range		Profile Width (B)	Profile Thickness (C)
		Min. (A)	Max. (A)		
IR-14680	SSHC-3/8"	.250	.625	.312	.022/.024
IR-14682	SSHC-1/2"	.437	.687	.312	.022/.024
IR-14684	SSHC-9/16"	.500	.906	.312	.022/.024
IR-14688	SSHC-5/8"	.562	1.062	.312	.022/.024
IR-14690	SSHC-5/8"	.562	1.062	.562	.021/.023
IR-14692	SSHC-3/4"	.687	1.250	.312	.022/.024
IR-14694	SSHC-3/4"	.687	1.250	.562	.021/.023
IR-14696	SSHC-1"	.937	1.500	.312	.022/.024
IR-14698	SSHC-1"	.937	1.500	.562	.021/.023
IR-14700	SSHC-1-1/4"	1.187	1.750	.312	.022/.024
IR-14702	SSHC-1-1/4"	1.187	1.750	.562	.021/.023
IR-14704	SSHC-1-1/2"	1.250	2.000	.562	.021/.023
IR-14706	SSHC-2"	1.562	2.500	.562	.021/.023
IR-14710	SSHC-3"	2.562	3.500	.562	.021/.023

Standard worm drive construction.
Slotted Hex Head Screw.

BAND: AISI Type 301 Stainless Steel
HOUSING: AISI Type 301 Stainless Steel
SCREW: AISI Type 305 Stainless Steel Passive

