


PTFE TUBING

POLYTETRAFLUOROETHYLENE (PTFE)

TRANSLUCENT

ICO RALLY Part Number	Inside Diameter	Outside Diameter	Wall Thickness	Standard Put-ups
IR-15150	0.012	0.030	0.009	100, 1,000
IR-15151	0.015	0.027	0.006	100, 1,000
IR-15152	0.015	0.033	0.009	100, 1,000
IR-15153	0.018	0.030	0.006	100, 1,000
IR-15154	0.018	0.036	0.009	100, 1,000
IR-15155	0.022	0.034	0.006	100, 1,000
IR-15156	0.022	0.040	0.009	100, 1,000
IR-15157	0.022	0.046	0.012	100, 1,000
IR-15158	0.027	0.039	0.006	100, 1,000
IR-15159	0.027	0.047	0.010	100, 1,000
IR-15160	0.027	0.051	0.012	100, 1,000
IR-15161	0.031	0.093	0.030	50, 100
IR-15162	0.034	0.046	0.006	100, 1,000
IR-15163	0.034	0.058	0.012	100, 1,000
IR-15164	0.034	0.066	0.016	100, 1,000
IR-15165	0.042	0.054	0.006	100, 1,000
IR-15166	0.042	0.066	0.012	100, 1,000
IR-15167	0.042	0.074	0.016	100, 1,000
IR-15168	0.053	0.065	0.006	100, 1,000
IR-15169	0.053	0.077	0.012	100, 1,000
IR-15170	0.053	0.085	0.016	100, 1,000
IR-15171	0.062	0.125	0.030	50, 100
IR-15172	0.062	0.187	0.062	50, 100
IR-15173	0.066	0.082	0.008	100, 500
IR-15174	0.066	0.090	0.012	100, 500
IR-15175	0.066	0.098	0.016	100, 500
IR-15176	0.085	0.101	0.008	100, 500
IR-15177	0.085	0.109	0.012	100, 500
IR-15178	0.085	0.117	0.016	100, 500
IR-15179	0.093	0.156	0.030	50, 100
IR-15180	0.106	0.122	0.008	100, 500
IR-15181	0.106	0.130	0.012	100, 500
IR-15182	0.106	0.138	0.016	100, 500
IR-15183	0.125	0.141	0.008	100, 250
IR-15184	0.125	0.155	0.015	100, 250
IR-15185	0.125	0.165	0.020	100, 250
IR-15186	0.125	0.187	0.030	50, 100
IR-15187	0.125	0.250	0.062	50, 100

ICO RALLY Part Number	Inside Diameter	Outside Diameter	Wall Thickness	Standard Put-ups
IR-15188	0.166	0.186	0.010	100, 250
IR-15189	0.166	0.196	0.015	100, 250
IR-15190	0.166	0.206	0.020	100, 250
IR-15191	0.187	0.207	0.010	100, 250
IR-15192	0.187	0.217	0.015	100, 250
IR-15193	0.187	0.227	0.020	100, 250
IR-15194	0.187	0.250	0.030	50, 100
IR-15195	0.187	0.312	0.062	50, 100
IR-15196	0.208	0.228	0.010	50, 100
IR-15197	0.208	0.238	0.015	50, 100
IR-15198	0.208	0.248	0.020	50, 100
IR-15199	0.250	0.270	0.010	50, 100
IR-15200	0.250	0.280	0.015	50, 100
IR-15201	0.250	0.290	0.020	50, 100
IR-15202	0.250	0.312	0.030	50, 100
IR-15203	0.250	0.375	0.062	50, 100
IR-15204	0.318	0.342	0.012	50, 100
IR-15205	0.318	0.348	0.015	50, 100
IR-15206	0.318	0.358	0.020	50, 100
IR-15207	0.318	0.375	0.030	50, 100
IR-15208	0.318	0.437	0.062	50, 100
IR-15209	0.375	0.437	0.030	50, 100
IR-15210	0.375	0.499	0.062	50, 100
IR-15211	0.437	0.500	0.030	50, 100
IR-15212	0.437	0.562	0.062	50, 100
IR-15213	0.500	0.562	0.030	50, 100
IR-15214	0.500	0.625	0.062	50, 100
IR-15215	0.562	0.625	0.030	50, 100
IR-15216	0.562	0.687	0.062	50, 100
IR-15217	0.625	0.685	0.030	50, 100
IR-15218	0.625	0.750	0.062	50, 100

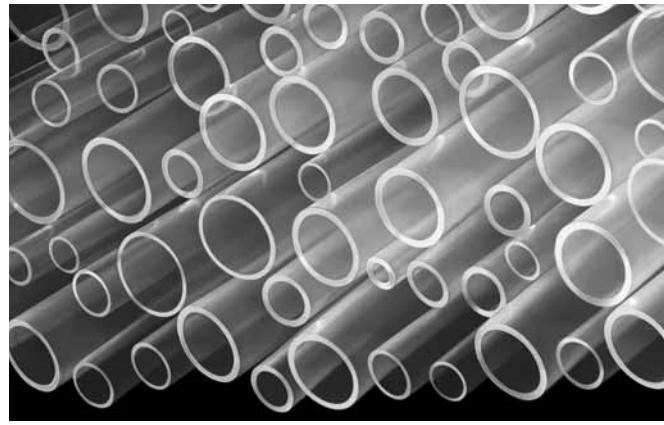

- Lowest coefficient of friction of any solid material
- Made without plasticizers, chemically inert
- Highest service temperature of any plastic tubing (-275°F to 500°F)
- PTFE tubing can be steamed or chemically sterilized
- PTFE tubing's non-stick property allows for transport of viscous, sticky materials without line clogging
- The translucent white color of PTFE varies naturally from lot to lot; however, the quality and physical properties do not change

Hardness, Shore A:	50 to 65
Tensile Strength:	3,000 to 5,000 psi
Elongation at Break:	200 to 400%
Brittle Temperature:	-400°F
Maximum Operating Temperature:	500°F