



NYLON WIRE TIES

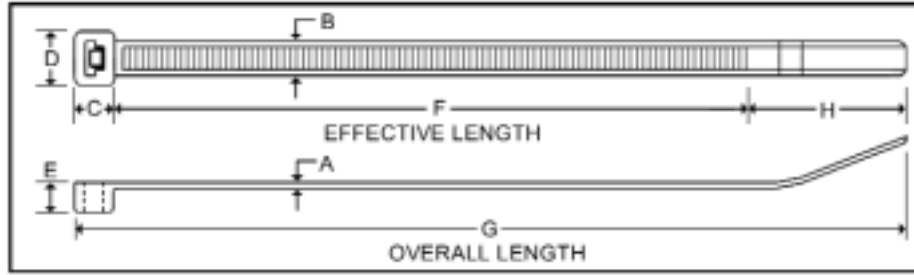

STANDARD - Self-Locking

Catalog Number Size	Minimum Tensile Strength		Bundle Diameter		Thick-ness A inches	Width B inches	Head Length C inches	Head Width D inches	Head Height E inches	Usable Length F inches	Overall Length G inches	Tip Length H inches	Conforms to:
	lbs	kg	min	max									
WRN-3-1/2	18	8.2	1/16	3/4	0.045	0.085	0.163	0.160	0.120	2-11/16	3-3/4	15/16	MS-3367-4
WRN-4	30	13.6	1/16	1	0.045	0.115	0.190	0.253	0.150	3-11/16	5-1/8	1-3/16	N/A
WRN-5-1/2	40	18.1	1/16	1-1/4	0.050	0.135	0.210	0.258	0.150	4-3/4	6-1/8	1-1/4	MS-3367-5
WRN-6-3/4	50	22.7	1/16	1-3/4	0.055	0.190	0.275	0.316	0.187	6	7-1/2	1-3/8	MS-3367-1
WRN-8	40	18.1	1/16	2	0.050	0.115	0.190	0.253	0.150	6-3/4	8	2-3/4	N/A
WRN-11	50	22.7	1/16	3	0.055	0.190	0.275	0.316	0.187	10-1/8	11-3/8	1-3/16	MS-3367-7
WRN-14	50	22.7	1/16	4	0.055	0.190	0.275	0.316	0.187	13-1/8	14-3/8	1-3/16	MS-3367-2
WRN-14HD*	120	54.4	3/16	4	0.083	0.310	0.350	0.505	0.295	14-1/4	14-5/8	1	MS-3367-3
WRN-21HD*	120	54.4	3/16	6	0.083	0.310	0.360	0.505	0.295	20-1/4	21-1/2	1	N/A
WRN-28HD*	120	54.4	3/16	8	0.083	0.310	0.360	0.505	0.295	27-1/8	28-1/4	1	MS-3367-6

*Not available w/ bent tip.
Please specify natural or black when ordering.

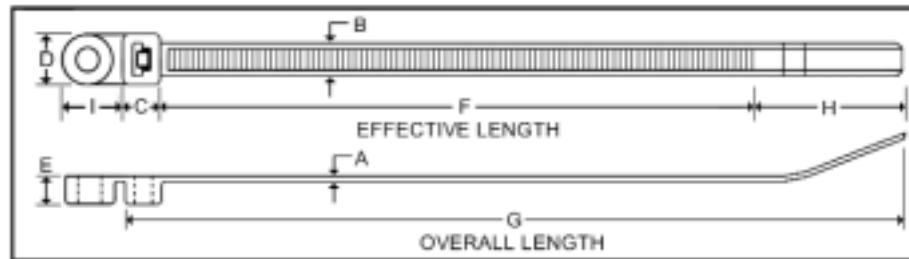

SCREWDOWN - Self-Locking

Catalog Number Size	Minimum Tensile Strength		Bundle Diameter		Thick-ness A inches	Width B inches	Head Length C inches	Head Width D inches	Head Height E inches	Usable Length F inches	Overall Length G inches	Tip Length H inches	Mtg Head Length I inches	Screw Size
	lbs	kg	min	max										
WRN-S-4	30	8.2	1/16	1	0.045	0.115	0.190	0.253	0.150	3-11/16	5-1/8	1-3/16	3/8	#4
WRN-S-5-1/2	40	13.6	1/16	1-1/4	0.045	0.135	0.210	0.258	0.150	4-3/4	6-1/8	1-1/4	15/32	#8
WRN-S-6-3/4	50	22.7	1/16	1-3/4	0.050	0.190	0.275	0.316	0.187	6	7-1/2	1-3/8	7/16	#10
WRN-S-11	50	22.7	1/16	3	0.055	0.190	0.275	0.316	0.187	10-1/8	11-3/8	1-3/16	7/16	#10
WRN-S-14	50	22.7	1/16	4	0.055	0.190	0.275	0.316	0.187	13-1/8	14-3/8	1-3/16	7/16	#10
WRN-S-14HD*	120	54.4	3/16	4	0.083	0.310	0.360	0.505	0.295	14-1/4	14-5/8	1	5/8	1/4"
WRN-S-21HD*	120	54.4	3/16	6	0.083	0.310	0.360	0.505	0.295	20-1/4	21-1/2	1	5/8	1/4"
WRN-S-28HD*	120	54.4	3/16	8	0.083	0.310	0.360	0.505	0.295	27-1/8	28-1/4	1	5/8	1/4"

*Not available w/ bent tip.
Please specify natural or black when ordering.